PROROOF
PROFESSIONAL ROOFING SOLUTIONS

ACRI-FULL FIBERED SYSTEM

STEP 1: BEFORE

ACRI-SEAL 2350

Sprayable Fibered Seam Sealant



STEP 2: FINAL LOOK

ACRI-GEL AC 2300

Acrylic Elastomeric Roof Coating




ACRI-SEAL 2350 + ACRI-GEL 2300 is a complete two-step acrylic roofing system engineered to permanently waterproof critical details while providing a durable, reflective roof coating for long-term protection. The system first seals all vulnerable roof details with a fiber-reinforced sealant, then protects the entire roof surface with a seamless acrylic elastomeric membrane. Ideal for Preventative Maintenance, Restoration, and Recoat applications.

RECOMMENDED USES:

- Metal Roofs
- TPO & PVC Membranes
- EPDM Membranes
- Modified Bitumen
- Smooth BUR
- Concrete Roofs
- Standing Seams & Fasteners
- Primed Asphaltic Roofs

WHY CHOOSE ACRI-SEAL / ACRI-GEL?

- 100% Acrylic for Permanent Flexibility
- High-Build – Up to 60 Mils DFT
- Fiber-Reinforced (replaces fabric)
- Seamless Waterproof Membrane
- Warranty: 5-20 years available
- Ideal for Preventative Maint. & Recoat
- Energy-Efficient Reflective Coating

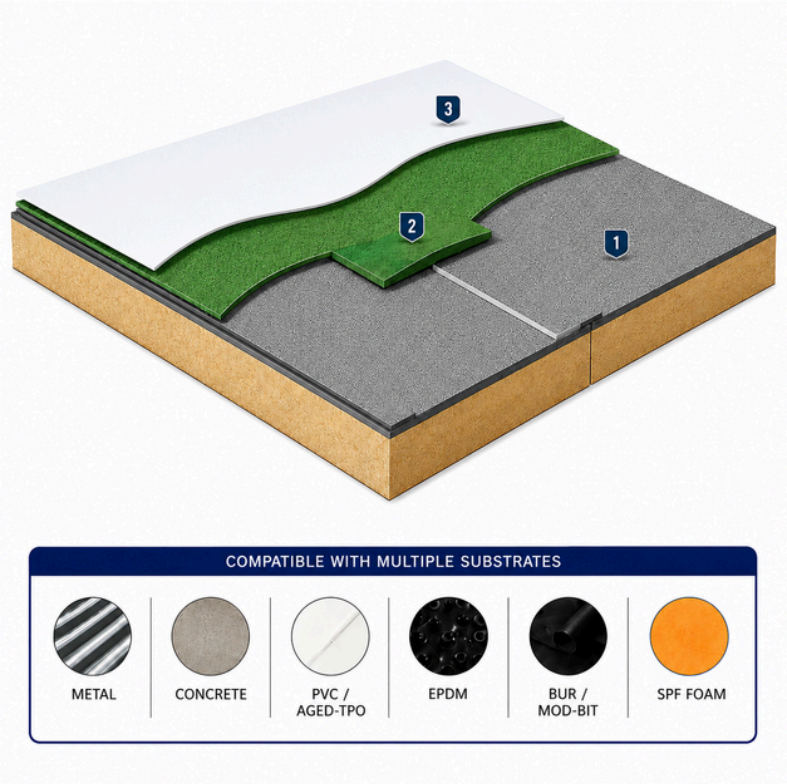

STEPS OF APPLICATION:

1. Properly prepare roof substrate and prime if required.
2. Apply Acri-Seal 2350 Fibered Sealant to seams, fasteners, and penetrations.
3. Apply Acri-Gel 2300 Top Coat High Build over entire roof.

LAYERS OF THE SYSTEM:

1. Prepare existing substate properly
2. Acri-Seal 2350 Fibered Base Coat
3. Acri-Gel 2300 High Build Top Coat

BUILT FOR LONG-TERM ROOF PERFORMANCE

TECHNICAL INFORMATION:

ACRI-SEAL

Volume Solids: 55% ± 2%
Tensile Strength: 525 PSI ± 25
Elongation: 275% ± 25
VOC: <50 g/L
Coverage: 1 gal / 80 LF @ 3" wide
Thickness: 80 wet mils / 44 dry mils
Dry Time: 5 hours
Complete Cure: 24 hours
Colors: White & Green

ACRI-GEL

Volume Solids: 55% ± 2%
Tensile Strength: 273 PSI ± 25
Elongation: 275% ± 20%
VOC: <50 g/L
Reflectivity: 86%
SRI: 107
Coverage: 1.5–6 gal/SQ
Application: 24–96 wet mils
Dry Time: 90 minutes @ 75°F / 50% RH
Colors: White, Gray & Tan

Key Features:

- Plus Cure-Free, Acrylic-Based Two-Step System
- No Adhesion Loss or Cracking
- Resists Dirt and UV Chemicals
- Exceptional Pigment Retention/Fade Protection
- Excellent Adhesion to Multiple Substrates
- Durable
- Breathable Membrane Allows Moisture Vapor to Escape





SEAL. PROTECT. RESTORE.

Ready to upgrade your roof system? ProRoof ACRI-SEAL 2350 paired with Acri-Gel 2300 delivers a complete, long-lasting waterproofing solution.
Contact ProGuard Building Products today to learn more about commercial roofing programs.

🌐 proguardbuilding.com
📞 1-844-PRO-GARD
✉️ sales@proguardbuilding.com

PROGUARDBUILDING
BUILDING ENVELOPE SOLUTIONS